



1. Mount housing on top portion of bottom slide



Position with slot toward front

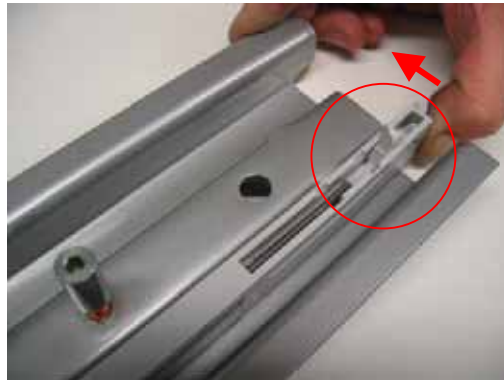

Pushing forward and to the inside, the back will fall into place.



Slide into place to fix

2. Mount stop



Position at punched-out notch at rear of bottom slide



Pull toward center and push down



Snap down to lock in place