



Standard

One Left - special order -





One Right - special order -

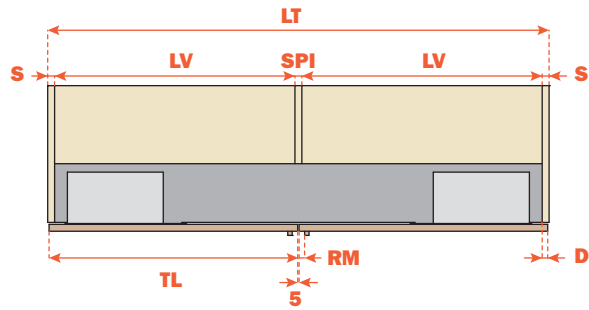

Step - special order -

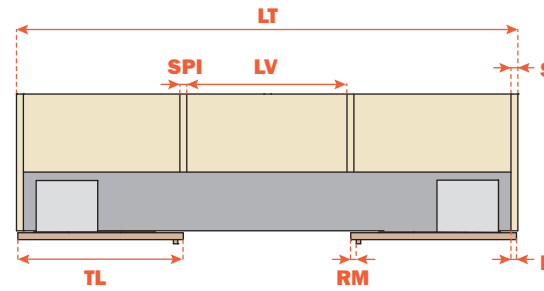

Reverso - special order -

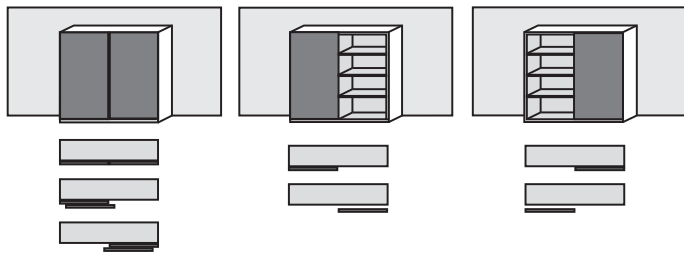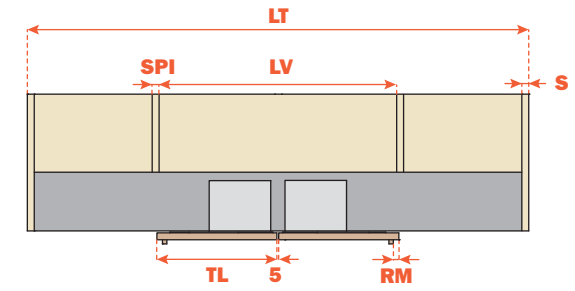

Maximum weight of a door 50 Kg	
LHT	Total cabinet height (mm)
SPC	Top panel thickness (mm) • min 18 mm
LHI	Internal cabinet height (mm)
SPB	Bottom panel thickness (mm)
TM	Door thickness + handle (mm) • min 18 mm - max 40 mm/45 mm recessed adj.
TH	Door height (mm) • max 3000 mm
T	Door thickness (mm) • min 16 mm • max 30 mm
LT	Total cabinet width (mm)
SPI	Central panel thickness (mm) • min 18 mm
S	Side panel thickness (mm)
TL	Door width (mm) • min 8001mm - max 2000 mm
RM	Distance from edge of the door to the handle (mm) • min 10 mm
D	Door overlay on side panel • max 25 mm
LV	Internal cabinet width (mm)

Contact name
Company
Date
Project
Distributor
Notes