



□ Wall cabinet

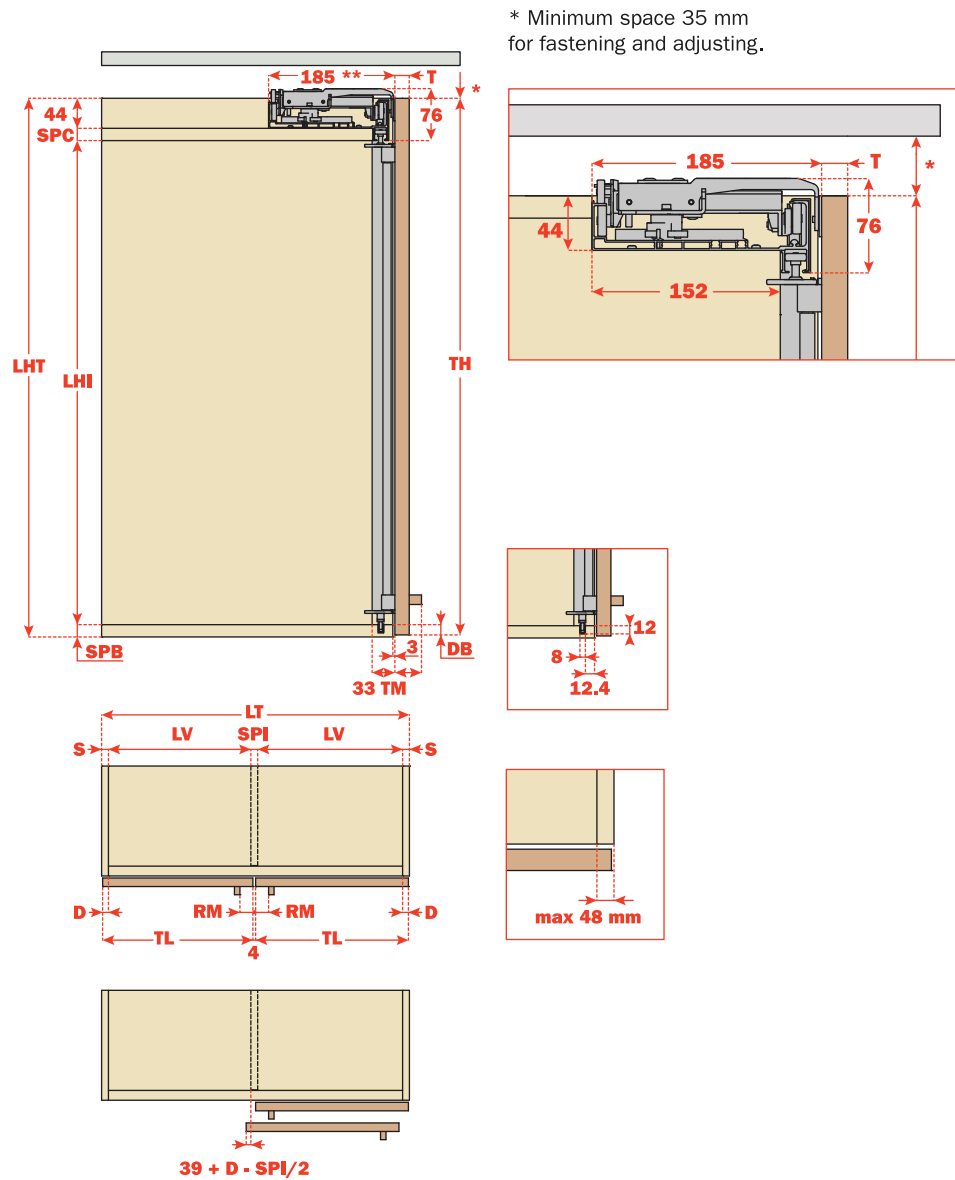

□ Base cabinet

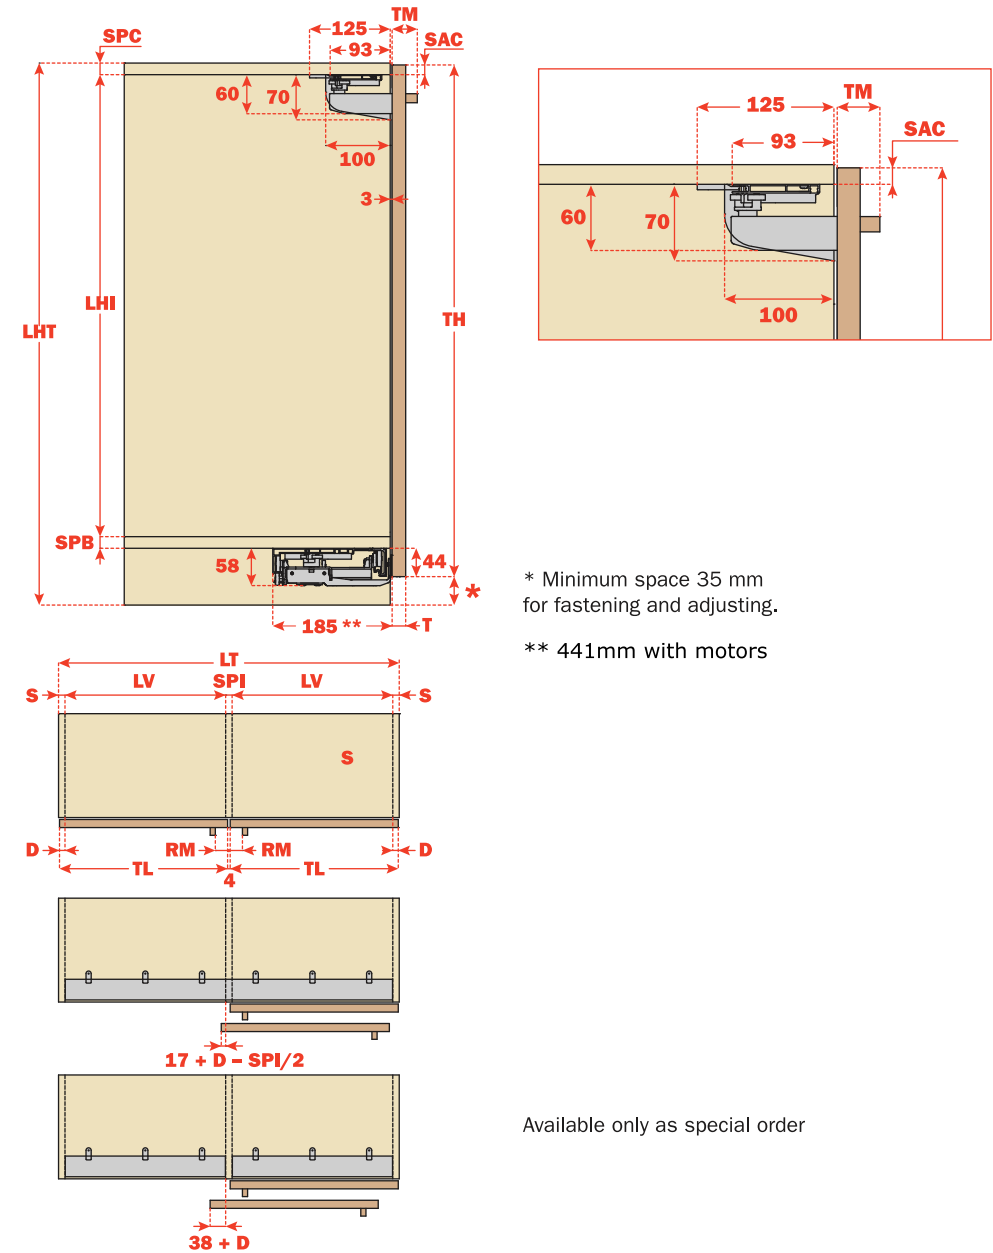

* Minimum space 35 mm for fastening and adjusting.

** 441mm with motors

Available only as special order






Standard

One Left
- Special order -

One Right
- Special order -

Step
- Special order -

Reverso
- Special order -

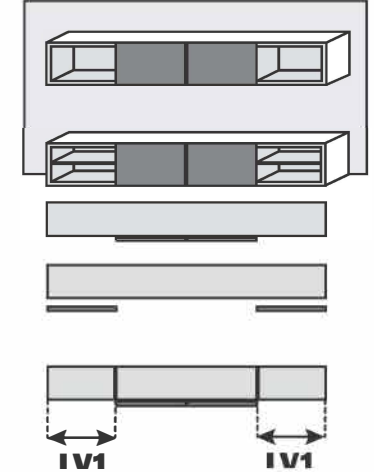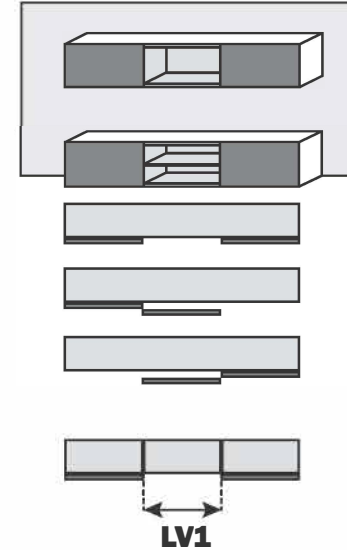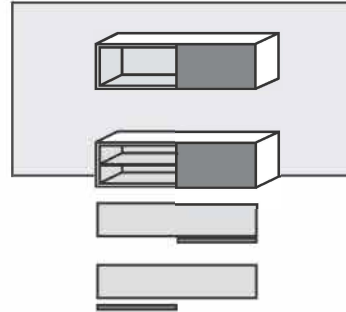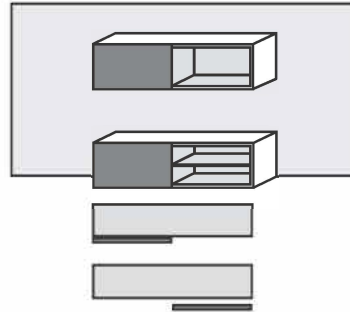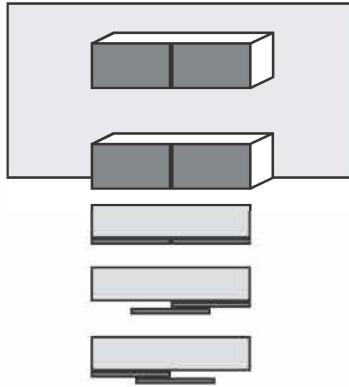

Maximum weight of a door 20 Kg	
LHT	Total cabinet height (mm)
SPC	Top panel thickness (mm)
LHI	Internal cabinet height (mm)
SPB	Bottom panel thickness (mm)
TM	Door thickness + handle (mm) • min 18 mm • max 45 mm
TH	Door height (mm) • max 1200 mm
T	Door thickness (mm) • min 18 mm • max 40 mm
LT	Total cabinet width (mm)
SPI	Central panel thickness (mm)
S	Side panel thickness (mm)
TL	Door width (mm) • min 600 mm • max 1500 mm
RM	Distance from edge of the door to the handle (mm)
D	Door overlay on side panel • max 48 mm
LV	Internal cabinet width (mm)
LV1	Internal cabinet width for systems Step and Reverso (mm)

Power

Kit Push for base cabinet only

Contact name
Company
Date
Project
Distributor
Notes