



Sliding Door Fittings Unotec Home Planning for glass doors (5/16" – 1/2" thickness)

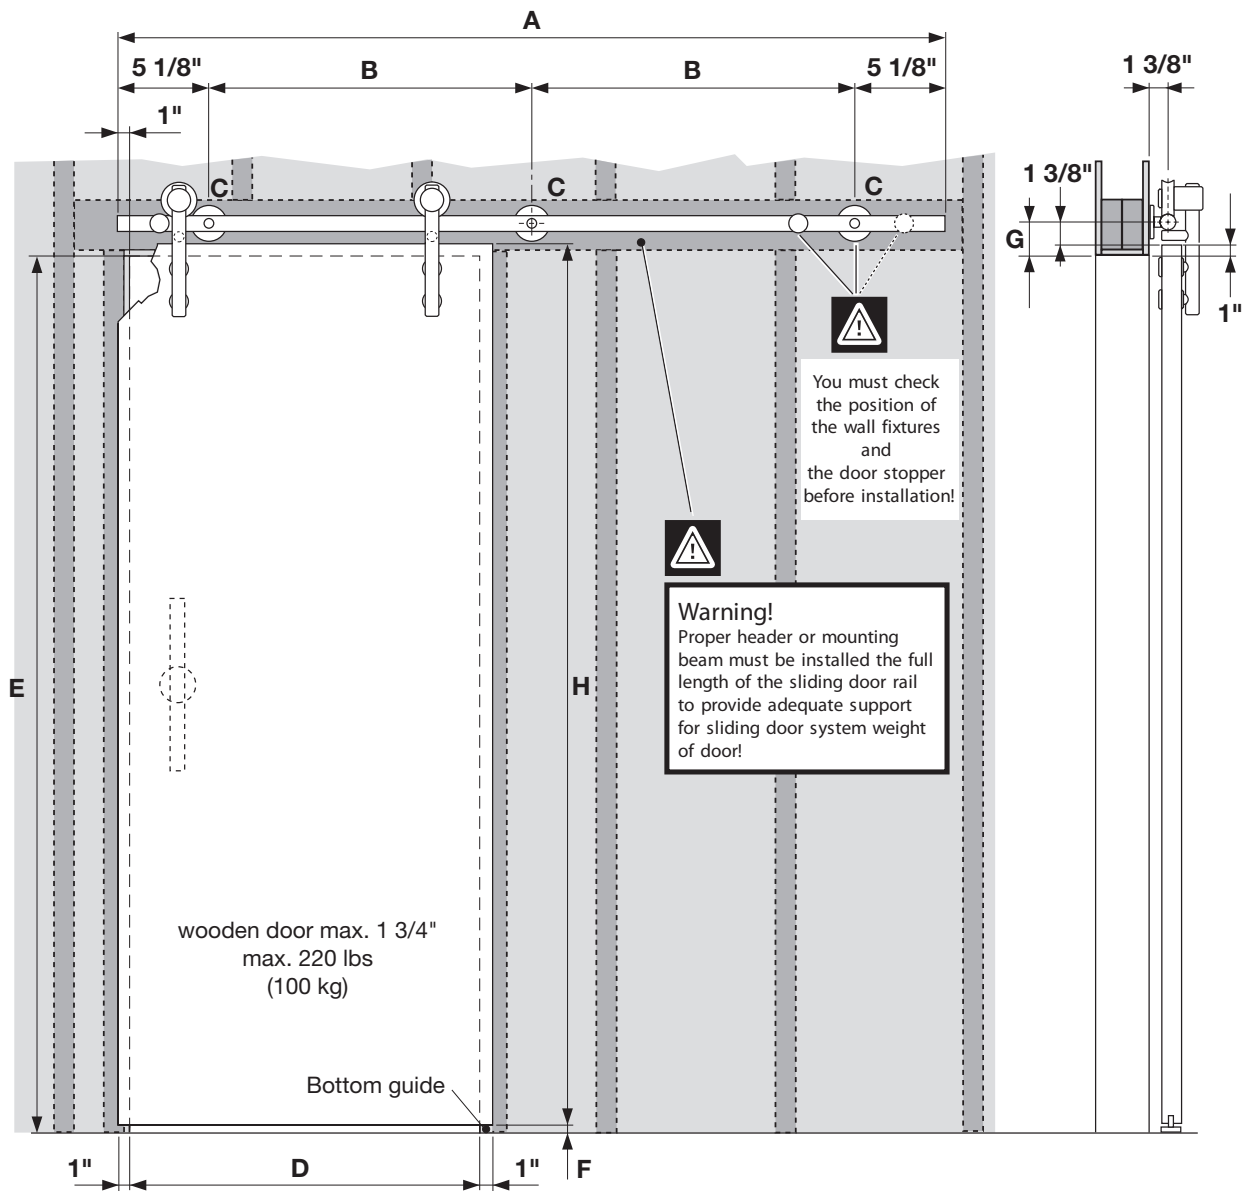

Complete-sets


Set Unotec Home Art. No.	A inch	B inch	C Each	D inch	E max. inch	F inch	G inch	H max. inch (H = E - F + 1")
941.07.020	70 7/8"	30 5/16"	3	29 1/2" - 35 7/16"	98 7/16"	1/4" - 3/8"	2 3/8"	99 1/8"
941.07.021	82 11/16"	24 1/8"	4	35 13/16" - 39 3/8"	98 7/16"	1/4" - 3/8"	2 3/8"	99 1/8"
941.07.022	90 9/16"	26 3/4"	4	39 3/4" - 44 1/16"	98 7/16"	1/4" - 3/8"	2 3/8"	99 1/8"
941.07.023	100"	29 15/16"	4	44 1/2" - 49 3/16"	98 7/16"	1/4" - 3/8"	2 3/8"	99 1/8"

Manufacturing dimensions (special model)										kg		
inches		Each	inches					H	Load-bearing capacity of the guide rail J	Each		
A	B	C	D	D1	E max. 98 7/16"	F 1/4" - 3/8"	G	max. 99 1/8" (H = E - F + Y)		L	M	N
							(2 3/8")			1	2	2

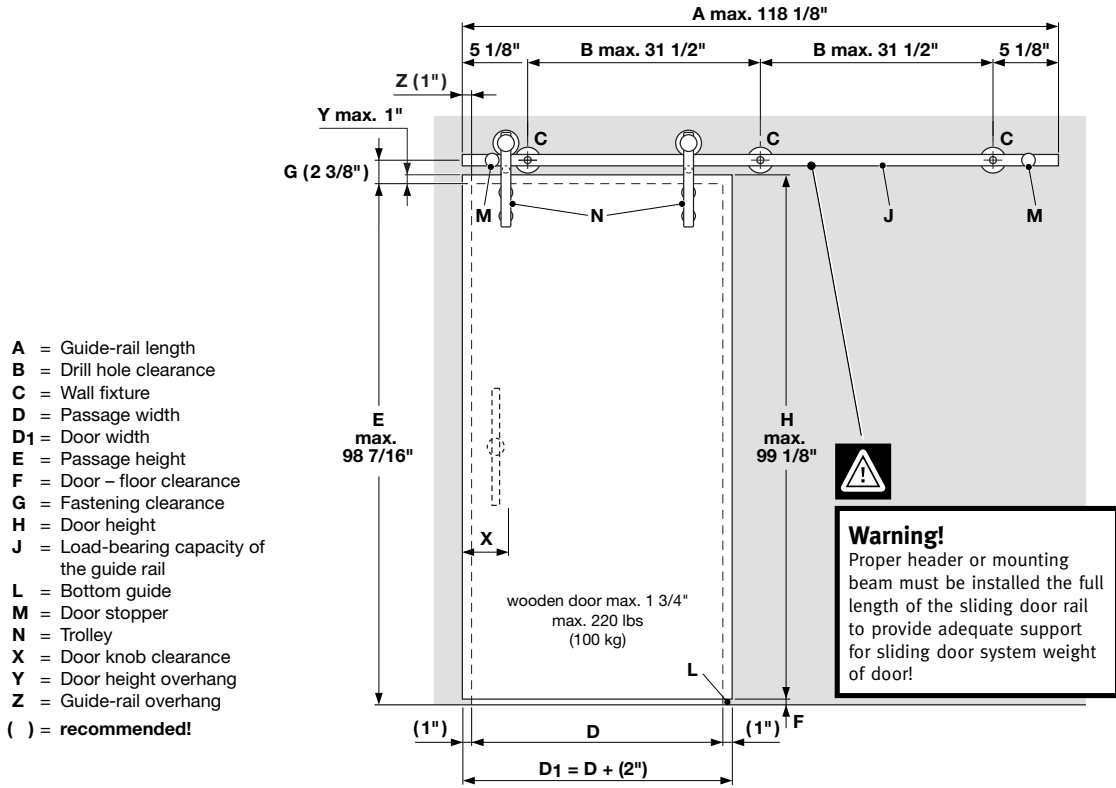

- A = Guide-rail length
- B = Drill hole clearance
- C = Wall fixture
- D = Passage width
- D1 = Door width
- E = Passage height
- F = Door - floor clearance
- G = Fastening clearance
- H = Door height
- J = Load-bearing capacity of the guide rail
- L = Bottom guide
- M = Door stopper
- N = Trolley
- X = Door knob clearance
- Y = Door height overhang
- Z = Guide-rail overhang
- () = recommended!


Calculation for guide-rail length A

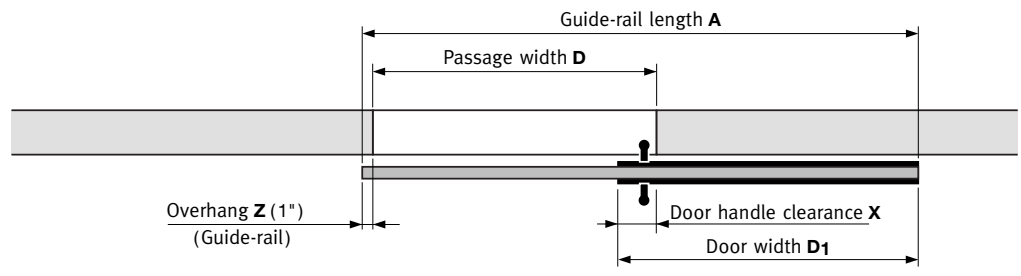


Overhang Z + Passage width D + Door width D1 - Door handle clearance X = Guide-rail length A

Make door handle clearance so that fingers do not get pinched when the door is manipulated! See page 5.

Manufacturing dimensions (special model)																
inches		Each		inches		E		F		H		kg				
A	B1	B2	C	D	D1	D2	max. 98 7/16"	1/4" - 3/8"	G	max. 99 1/8"	(H = E - F + Y)	Load-bearing capacity of the guide rail J	Each			
									(2 3/8")				K	L	M	N
													1	2	4	4

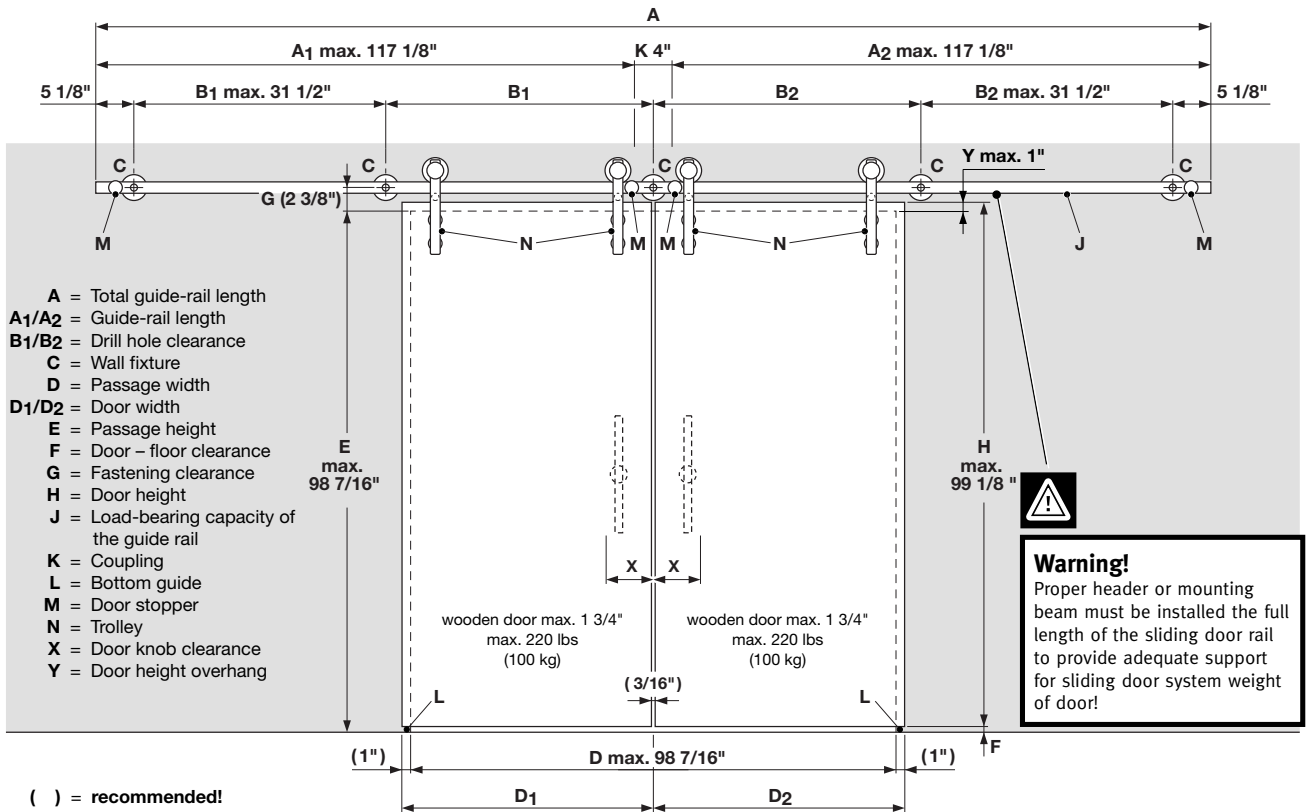

Calculation for total guide-rail length A

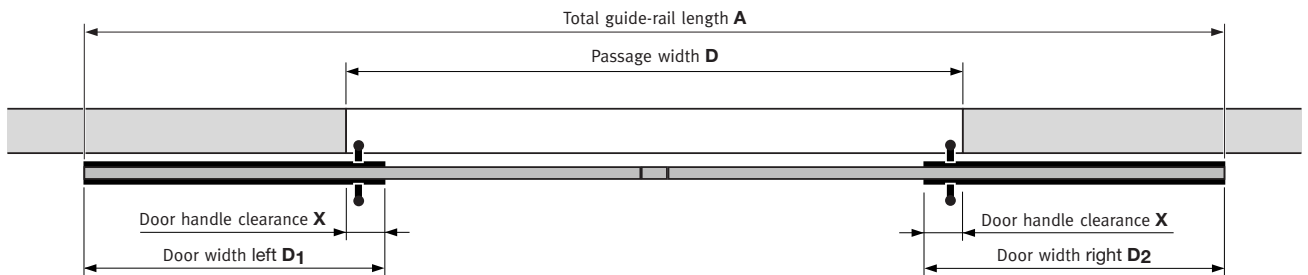


Door width D_1 - Door handle clearance X + Passage width D + Door width D_2 - Door handle clearance X = Total guide-rail length A




Make door handle clearance so that fingers do not get pinched when the door is manipulated! See page 5.

Standard installation

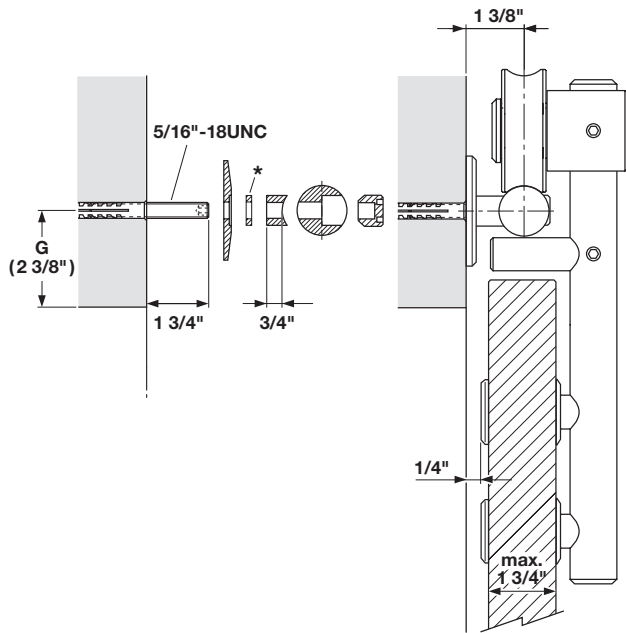



Installation with baseboards and trim

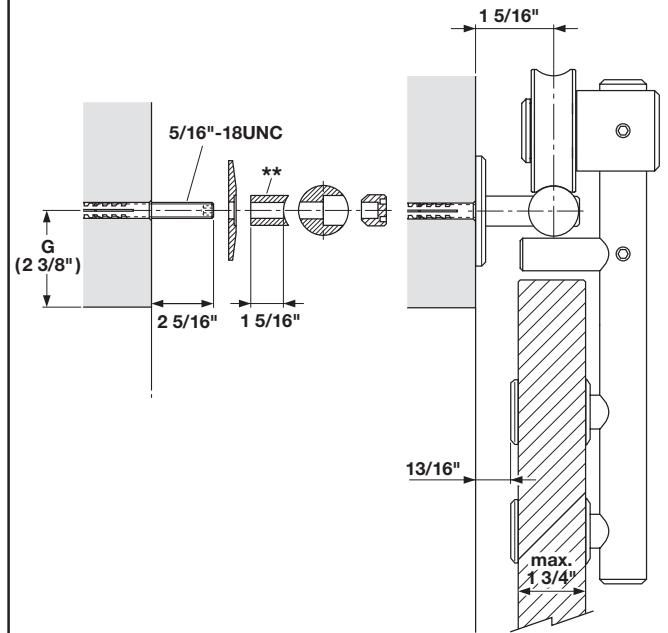


* Compensation disks 1/16", 3/16" and 3/8"
 To compensate for wall unevenness,
 order separately.
 (Only 1 piece per wall fixture!)


** Spacers order separately.

	Art.-No.	inches
	941.07.105	1/16"
	941.07.106	3/16"
	941.07.107	3/8"

	Art.-No.
	941.07.103

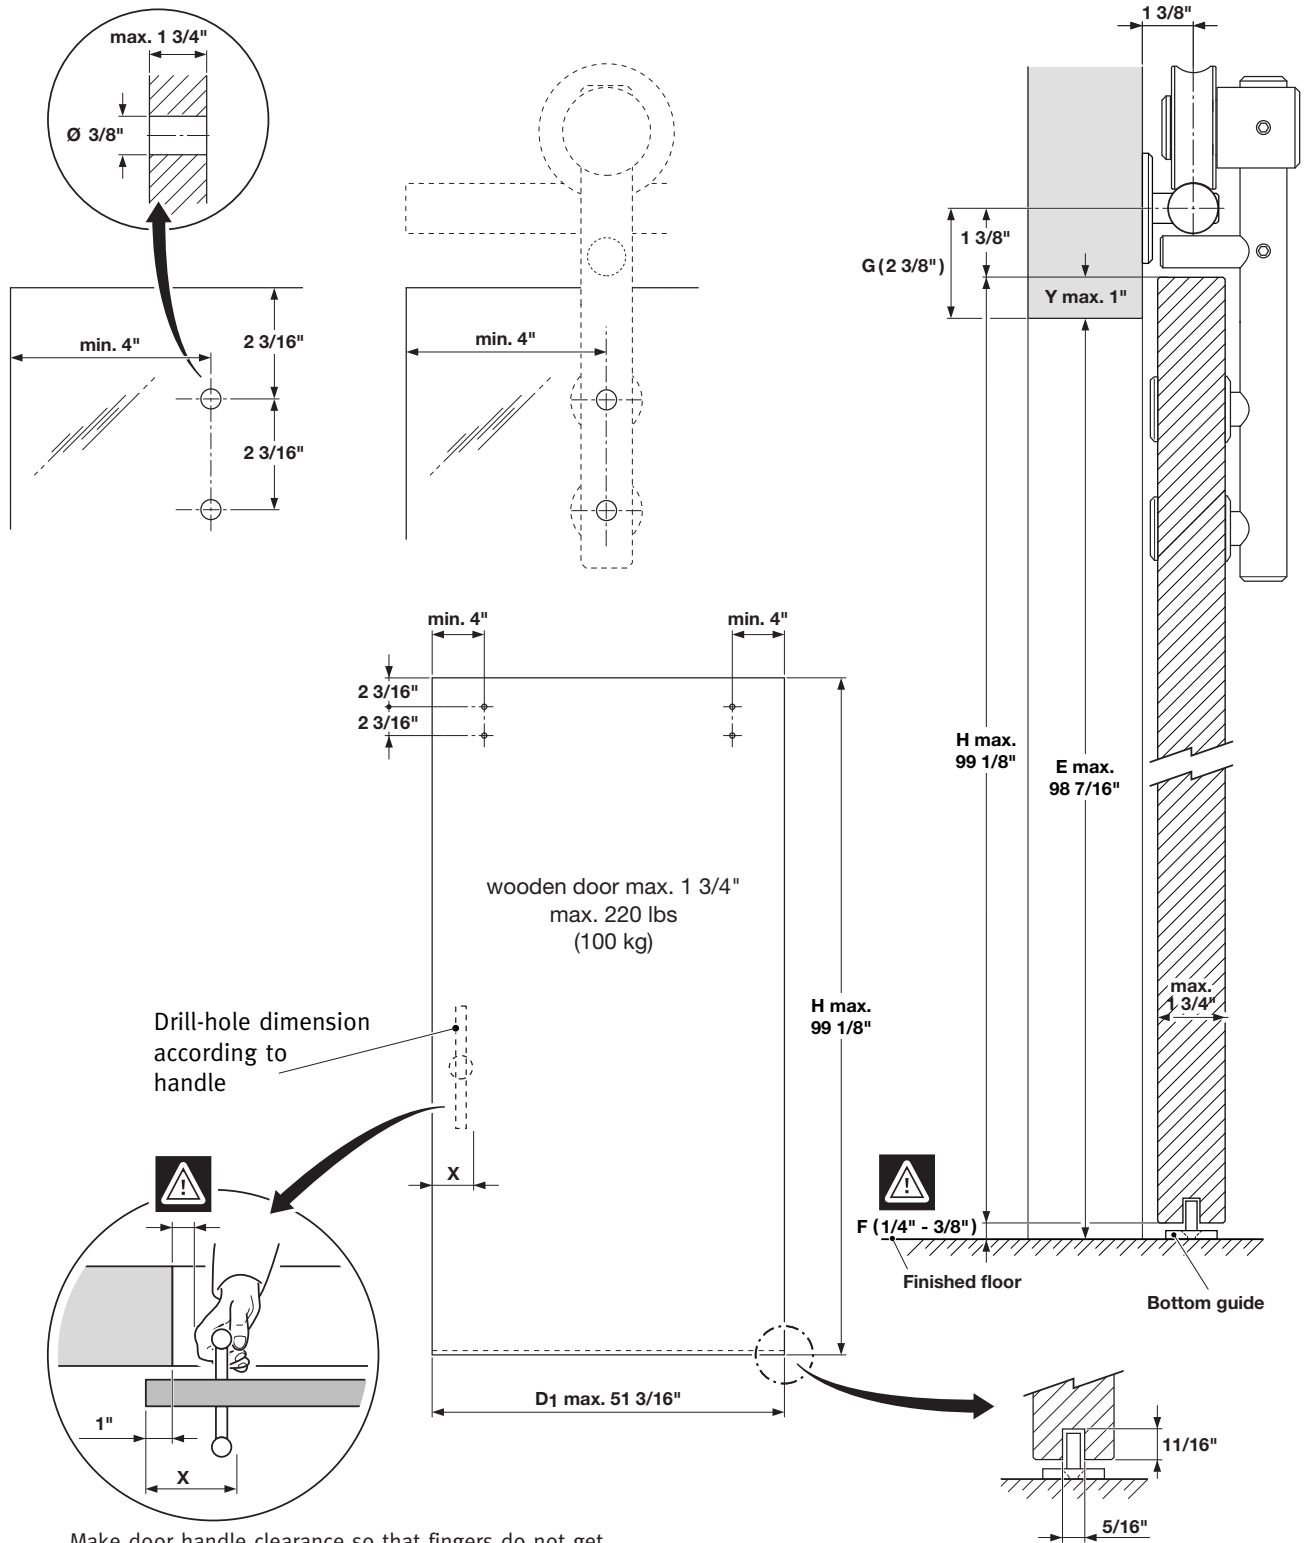


Make door handle clearance so that fingers do not get pinched when the door is manipulated!




A

Guide rail Ø 1" inch




A1

Guide rail Ø 1" inch
for guide rail couplings

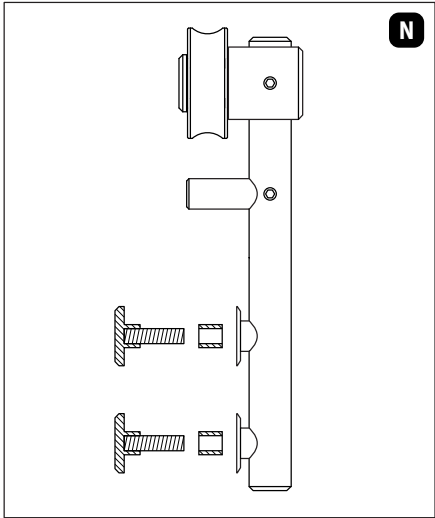

N

Trolley complete

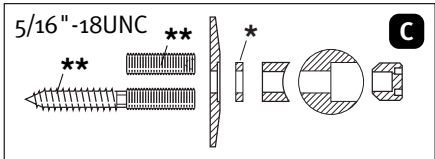

5/16"-18UNC

**


*

C

Wall fixtures complete


** Without screws and dowels, at construction site

* Compensation disks * 1/16", 3/16" and 3/8" order separately

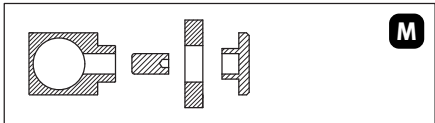


M

Door stoppers complete, stainless steel

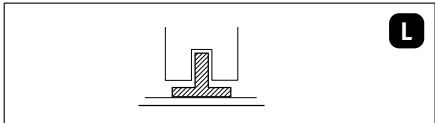


L

Bottom guide, plastic
(Without screws and dowels, at construction site)



K

Guide rail coupling Ø 1" inch

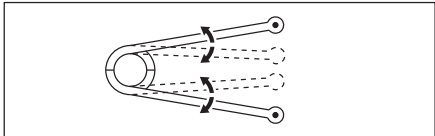

Special tool

HÄFELE

3901 Cheyenne Drive • P.O. Box 4000 • Archdale, NC 27263
1-800-423-3531 • www.hafele.com