


- High grade stainless steel
- Load rating up to 65kg
- 100% extension
- 19.1mm slide thickness
- Hold-in
- Ideal for environments where mild steel might be subject to corrosion

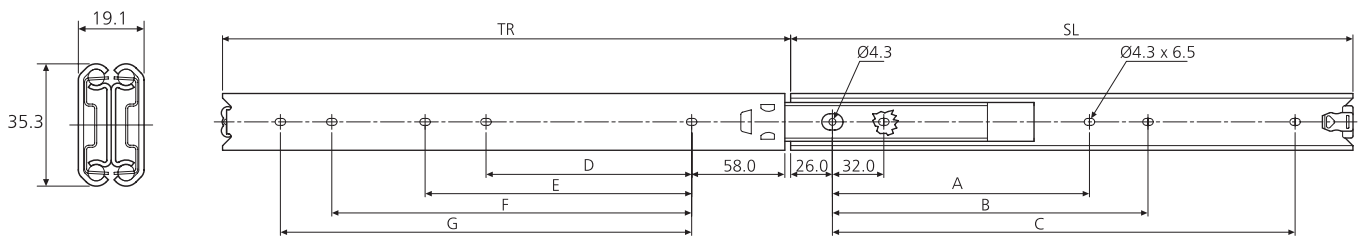

| 0330 | mm | | | | | | | | |
|-------------|-----|-------|-----|-----|-----|-----|-----|-----|-----|
| | SL | TR | A | B | C | D | E | F | G |
| DS0330-0030 | 300 | 304.5 | - | 192 | 224 | - | - | 192 | 224 |
| DS0330-0035 | 350 | 354.0 | - | 224 | 256 | - | - | 224 | 256 |
| DS0330-0040 | 400 | 403.0 | - | 192 | 320 | 160 | - | 288 | 320 |
| DS0330-0045 | 450 | 452.0 | - | 224 | 352 | 192 | - | 320 | 352 |
| DS0330-0050 | 500 | 501.0 | 256 | 288 | 416 | 224 | 256 | 384 | 416 |
| DS0330-0055 | 550 | 550.5 | 288 | 320 | 480 | 256 | 288 | 416 | 448 |
| DS0330-0060 | 600 | 600.0 | 320 | 352 | 512 | 288 | 320 | 480 | 512 |
| DS0330-0070 | 700 | 698.0 | 352 | 384 | 608 | 320 | 352 | 576 | 608 |

Notes:

- Fixing recommendation: M4